

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
3 July 2003 (03.07.2003)

PCT

(10) International Publication Number  
**WO 03/054352 A1**

(51) International Patent Classification<sup>7</sup>: **E21B 43/27**,  
43/25

(21) International Application Number: PCT/EP02/13848

(22) International Filing Date: 6 December 2002 (06.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/343,145 21 December 2001 (21.12.2001) US  
10/065,144 20 September 2002 (20.09.2002) US

(71) Applicant (for AE, AG, AL, AU, BA, BB, BE, BF, BG, BJ, BR, BZ, CF, CG, CH, CI, CM, CN, CO, CR, CU, CY, CZ, DM, DZ, EC, EE, ES, FI, GA, GD, GE, GH, GM, GN, GQ,

GR, GW, HU, ID, IE, IL, IN, IS, KE, KP, LC, LK, LR, LS, LT, LU, LV, MA, MC, MG, MK, ML, MN, MR, MW, MX, MZ, NE, OM, PH, PT, SC, SD, SE, SG, SI, SK, SL, SN, SZ, TD, TG, TN, TR, TT, TZ, UG, UZ, VC, VN, YU, ZM, ZW only): **SOFITECH N.V.** [BE/BE]; 140 rue de Stalle, B-1180 Brussels (BE).


(71) Applicant (for CA only): **SCHLUMBERGER CANADA LIMITED** [CA/CA]; Eau Claire Place I, 525 3rd Avenue, SW, Alberta, Alberta T2P004 (CA).

(71) Applicant (for FR only): **SERVICES PETROLIERS SCHLUMBERGER** [FR/FR]; 42 rue Saint Dominique, F-75007 Paris (FR).


(71) Applicant (for AM, AT, AZ, BY, DE, DK, HR, IT, KG, KR, KZ, MD, NO, NZ, PL, RO, RU, TJ, TM, UA, ZA only): **SCHLUMBERGER TECHNOLOGY B.V.** [NL/NL]; Parkstraat 83-89, NL-2514 JG The Hague (NL).

[Continued on next page]

(54) Title: A NOVEL FLUID SYSTEM HAVING CONTROLLABLE REVERSIBLE VISCOSITY

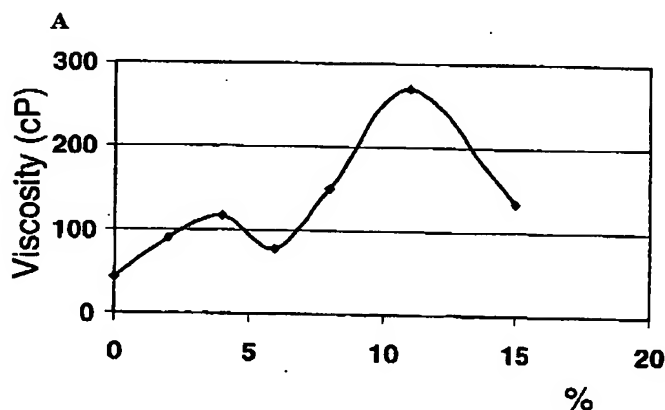

(57) Abstract: This invention relates to methods of treating a subterranean hydrocarbons reservoir comprising contacting the formation with a treating fluid comprising an aqueous solution, an acid, a surfactant acting as gelling agent essentially consisting of erucylamidopropyl betaine (or a protonated/deprotonated homolog or salt thereof). The treating fluid may further comprise a lower n-alcohol for improved temperature stability.

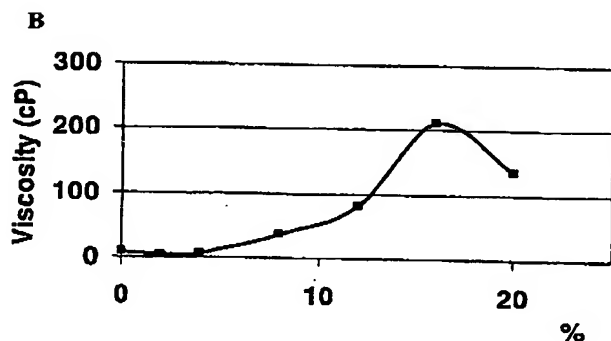

WO 03/054352 A1



(71) **Applicant** (*for GB, JP, NL only*): **SCHLUMBERGER HOLDINGS LIMITED** [—/—]; P. O. Box 71, Craigmuir Chambers, Road Town, Tortola (VG).

(72) **Inventors**: **CHANG, Frank, F.**; 7215 Emerald Glen Drive, Sugar Land, TX 77479 (US). **FU, Diankui**; 1819 Brightlake Way, Missouri City, TX 77459 (US).

(74) **Agent**: **MENES**; Etudes et Productions Schlumberger, 1, rue Henri Becquerel, BP 202, F-92142 Châtenay (FR).

(81) **Designated States** (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States** (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## A Novel Fluid System Having Controllable Reversible Viscosity

### Technical Field of the Invention

[0001] This invention relates to fluid compositions whose viscosity can be carefully modulated—from very low viscosity to sufficient viscosity to act as a barrier to further flow. More specifically, the invention relates to diverting fluids used for stimulating hydrocarbon-bearing formations—i.e., to increase the production of oil/gas from the formation.

### Introduction to the Technology

[0002] Hydrocarbons (oil, natural gas, etc.) are obtained from a subterranean geologic formation (i.e., a “reservoir”) by drilling a well that penetrates the hydrocarbon-bearing formation and thus causing a pressure gradient that forces the fluid to flow from the reservoir to the well. Often, a well production is limited by poor permeability either due to naturally tight formations or to formation damages typically arising from prior well treatment, such as drilling, cleaning etc.

[0003] To increase the net permeability of a reservoir, it is common to perform a well stimulation. The most common stimulation technique consists of injecting an acid that reacts with and dissolves the damage or portion of the formation thereby creating alternative flowpaths for the hydrocarbons to migrate through the formation to the well. This technique known as acidizing may eventually be associated with fracturing if the injection rate and pressure is enough to induce the formation of a fracture in the reservoir.

[0004] Fluid placement is critical to the success of stimulation treatment. Natural reservoirs are often heterogeneous; the acid fluid will preferentially enter areas of higher permeability in lieu of treating the areas where a treatment is most needed. Similarly, acid treatment tends to remove the damages that are easier to reach, due to a lower degree of damage or higher permeability. Each additional volume of acid fluid follows the path of less resistance, failing to remove the most important damages. The critical character of fluid placement is exacerbated by the fact that the acid reacts extremely quickly and consequently, is spent almost immediately and therefore not available for treating the untreated areas.

[0005] In order to control placement of treating fluids, various techniques have been employed. Mechanical techniques involve for instance the use of ball sealers and packers and of coiled tubing placement to specifically spot the fluid across the zone of interest. Non mechanical techniques typically make use of gelling agents as diverters for temporary impairing the areas of higher permeability and increasing the proportion of the treating zone that goes into the areas of lower permeability. Of course, a diverter should not itself damage the reservoir and therefore it is important that it can be easily removed following the acid treatment so that the zones of higher permeability remain so.


[0006] Most commercialized chemical diverters are based on cross-linked polymers. Unfortunately, these systems leave residues in the formation, which can damage the formation, resulting in diminished hydrocarbon production. In addition, the cross-linking reaction is easily perturbed by formation chemistry, contaminants in the pumping equipment, and so forth.

[0007] It is also known to use self-diverting acids, typically consisting of hydrochloric acid mixed with a gelling agent and a pH-sensitive cross-linker. Self-diverting acids are typically designed to gel at intermediate pH values, when the acid is partially spent. Self-diverting systems not based on cross-linking chemistry by which rely upon viscoelastic surfactants are described in U.S. Pat. No. 4,695,389 (see also, U.S. Pat. No. 4,324,669, and British Patent No. 2,012,830, both cited there)—which has a common assignee as the present application. Viscoelastic surfactants based systems exhibit very low friction pressure and therefore are easy to pump and yet, form a gel downhole. U.S. Pat. No. 4,695,389 discloses a viscoelastic surfactant-based gelling agent intended for use in acid fracturing. The particularly preferred embodiment is a fluid comprised of N,N-bis(2-hydroxyethyl) fatty amine acetic acid salt (the gelling agent), an alkali metal acetate salt, acetic acid (the acid—which actually removes the damage from the formation), and water.

[0008] Improved self-diverting systems have been described in U.S. Patent Application 09/419,842, having a common assignee as the present application and its corresponding International Patent Application WO 01/29369. This application, hereby incorporated by reference, provides formulations suitable for acid treatment comprising an amphoteric surfactant that gels as the acid spends in presence of an activating amount of a co-surfactant and of multivalent cations typically generated by the acid reaction with the formation. When

the gelling agent is mixed in hydrochloric acid, the co-surfactant prevents the gelling of the solution; the solution gels when the pH increases above 2.

[0009] In a preferred embodiment, the amphoteric surfactant is oleylpropyl betaine of the

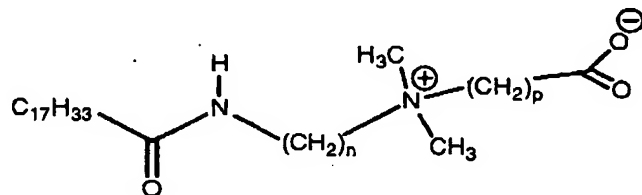

formula:

5 [0010] and the co-surfactant is preferably sodium dodecyl benzene sulfonate.

[0011] Compositions known from the U.S. Patent Application 09/419,842, and its corresponding International Patent Application WO 01/29369, have been of limited commercial applications due to temperature limitations. In particular, formulations based on oleylamidopropyl betaine and sodium dodecyl benzene sulfonate can only be used for  
10 temperature below about 200°F (93°C) while the carbonate acidizing market calls for temperature up to about 300°F (about 150°C).

[0012] It is therefore an object of the present invention to provide new self-diverting acid formulations with improved temperature stability.

### Summary of the Invention

15 [0013] According to a first embodiment of the present invention, there is provided a method for stimulating a subterranean hydrocarbons reservoir comprising contacting the formation with a treating fluid consisting of an acid, erucylamidopropyl betaine (or a protonated, deprotonated, homolog or salt thereof), and a n-alcohol, typically selected among methanol and/or ethanol, and most preferably being methanol. The formulation of the present invention  
20 may also comprise various standard additives such as corrosion inhibitors, non-emulsifiers and iron control agents.

[0014] As for the compositions known from U.S. Patent Application 09/419,842, the compositions of the present invention exhibit a nearly water-like viscosity upon addition of the acid to the base fluid consisting of water and the viscoelastic surfactant (the  
25 erucylamidopropyl betaine). A viscous gel starts to develop when the acid spends to react with a carbonate formation. The gel maintains a high viscosity so continuous diversion can be

achieved during pumping. After completion of the job and resume of the hydrocarbon production, the produced hydrocarbons lower the gel viscosity down to near water-like viscosity, leaving no residue.

[0015] Most preferably the compositions of the present invention comprise methanol, preferably at concentration of between about 0.1% and about 10%, by volume, most preferably at concentration of between about 1 and 2% by volume. Methanol essentially performs two functions: it compensates for any loss of alcoholic solvent during mixing of fluids before pumping (BET-E as received contains about 22% isopropyl alcohol, however, addition of more isopropyl alcohol will have negative impact on fluid viscosity at high temperature. BET-E in spent acid needs certain range of alcohol concentration to have the optimum fluid performance) and improves solubility of BET-E surfactant in high concentration of spent acid at high temperature preventing the potential phase separation of surfactant from brine solution, thus improving the gel stability at high temperature. Consequently, the system of the present invention does not require the addition of a co-surfactant. In most cases, co-surfactant with shorter hydrocarbon chain decreases the gel stability at high temperatures.

[0016] The acid is selected from the group consisting of hydrochloric, a mixture of hydrochloric and hydrofluoric acids, fluoroboric acid, nitric acid, phosphoric acid, maleic acid, citric acid, acetic acid, and formic acid. According to a preferred embodiment of the invention, the acid is hydrochloric acid and is added at a concentration of between about 3% and about 28% by weight, most typically at concentration between about 15% and about 28%.

[0017] According to a preferred embodiment of the invention, the viscoelastic surfactant is added at a concentration of between about 1 and about 4%, by weight active material (the surfactant is typically delivered in solution). Most preferably, the surfactant is added at active concentration between about 2 and about 3% by weight. Higher concentrations may be used depending on the formation permeability range and contrast.

[0018] In a most preferred embodiment, for applications where the bottomhole static temperature ranges from about 25°C to about 150°C, a formulation comprising 3 weight percent of viscoelastic surfactant and 1 volume percent of methanol is recommended.

[0019] Unlike other diverting materials, the fluids of the invention can be pumped as a single fluid, which will stimulate and divert in one step. It can be bullheaded down tubing or, according to a preferred embodiment, placed using coiled tubing moved up and down while injecting the acidic formulation. According to another embodiment, the fluid is pumped in several stages, alternately with regular acid stages.

[0020] As it is the rule for acid treatment, the formulation will typically comprise corrosion inhibitors, most preferably based on quaternary amines. Further agents may be typically added such as for instance non-emulsifier and iron reducing agent, chelating agent. It should be noted that the formulation of the present invention is sensitive to iron, in particular to ferric ions. A preflush treatment with iron reducing agent and chelating agent is therefore recommended before the acid treatment. Though the formulation of the invention is compatible with small concentration of non-emulsifying agent, to prevent emulsion and sludge, it is also a good practice to preflush the well with a mutual solvent, preferably low molecular weight esters, ether and alcohols, and more preferably ethylene glycol monobutyl ether.

[0021] Though the present Invention is directed primarily to matrix acidizing, it is entirely applicable to a closely related stimulation technique, acid fracturing, which is very similar, but involves pumping the acid at or above pressures sufficient to fracture the formation (minimum in situ rock stress). For convenience sake, the focus here shall be directed to matrix acidizing.

#### **Brief Description of the Drawings**

[0022] The above and further objects, features and advantages of the present invention will be better understood by reference to the appended detailed description and to the drawings wherein:

[0023] Figure 1A and 1B show the viscosity profile of solutions comprising erucylamidopropyl betaine as a function of HCl spending (X axis is percentage of HCl being spent starting from 15% (1A) and 20% (1B), in other words, 8% shown in graph 1B indicates there is still 12% HCl in the solution)

[0024] Figure 2 shows the viscosity profile at a shear rate of  $40\text{sec}^{-1}$ , of two gels, with or without added methanol, at temperature ranging from room temperature to about  $150^{\circ}\text{C}$ ;

[0025] Figure 3 shows the viscosity profile of gels, with or without added methanol, as a function of temperature and shear rate;

[0026] Figure 4 shows the viscosity profile of various gels with various concentration of methanol, as a function of temperature;

5 [0027] Figure 5 shows comparative viscosity profiles of various gels with no alcohol, methanol and ethanol for a gel comprising 28% spent HCl;


[0028] Figure 6 shows comparative viscosity profiles of various gels with no alcohol, methanol and ethanol for a gel comprising 15% spent HCl;

10 [0029] Figure 7 shows the viscosity profile of various spent gels with various concentration of isopropanol, as a function of temperature;

[0030] Figure 8 shows the viscosity profile of various spent gels with various concentration of methanol, as a function of temperature.

[0031]

15 [0032] The composition of the present invention are erucylamidopropyl betaine, an amphoteric surfactant having the general formula:

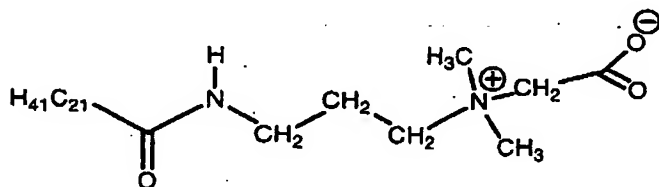

20 [0033] The viscosity development of a solution comprising erucylamidopropyl betaine during acid spent is illustrated figure 1A and 1B. The test in Figure 1A was performed at room temperature, with a solution comprising 15%HCl and 3wt% of erucylamidopropyl betaine. For the second test shown figure 1B, the solution comprised 20%HCl and 3wt% of erucylamidopropyl betaine. To be noted that in both figures, the X-axis is the percentage of HCl spent, starting from 15% (figure 1 -A) or 20% (figure 1-B). In other words, in figure 1B, 8% shown in graph indicates there is still 12% HCl in the solution). The viscosity was measured at a shear rate of 170s<sup>-1</sup>. As soon as the spending starts, the viscosity increases. To



be noted that in practice, the gel is later broken by the hydrocarbons of the subterranean formation.

[0034] Figure 2-A shows the viscosity (using a logarithm scale) of a gel at elevated temperature. The gel was prepared by adding first 0.6% of a corrosion inhibitor and 2% of corrosion inhibitor aid into a 20% HCl solution with or without methanol. The surfactant is then added to the solution at an active concentration of 3% by weight. After well dispersed, the mixture was then let react with powder  $\text{CaCO}_3$  until the acid is neutralized to a pH value of 3.5 to 4 at 180°F. A viscoelastic gel forms when the pH reaches above 2 to 2.5. The gel is loaded in a Fann 50 rheometer to measure the viscosity (in CentiPoises or milliPascals second) at specified temperatures, at a shear rate of  $40 \text{ sec}^{-1}$ .

[0035] The gel that does not contain methanol has a viscosity profile represented by a dotted line. The gel reaches a peak of viscosity for a temperature ranging between 120°F and 130°F (about 50°C). At higher temperature, the viscosity sharply declines, followed by a lowered plateau near 100 cP from 150°F to 200°F (about 65°C to about 93°C). The addition of methanol (plain line) is detrimental to the quality of the gel at lower temperatures but helps extends the temperature at which the gel exhibits the maximum viscosity.

[0036] Figure 2-B shows the viscosity at a shear rate of  $100 \text{ sec}^{-1}$  of a gel at elevated temperature. The gel was prepared by preparing 42%  $\text{CaCl}_2$  solution (simulated 28% HCl being spent with  $\text{CaCO}_3$ ) with or without methanol and adding the surfactant to the solution at an active concentration of 3% by weight. The gel that does not contain methanol has a viscosity profile represented by a dotted line. The gel reaches a peak of viscosity for a temperature of about 150°F and 130°F (about 65°C). At higher temperature, the viscosity sharply declines, followed by a lowered plateau near 200°F (about 93°C). In this test, the addition of methanol (plain line) is favorable to the quality of the gel at lower temperatures and higher temperature.

[0037] In figure 3, the viscosity of the gel at different shear rates ( $40$ ,  $100$ , and  $170 \text{ sec}^{-1}$ ) is presented. The gels are prepared the same way as described in the example of figure 2-A, except for the starting HCl concentration. In this current example the HCl concentration used is 28% while in the previous example the acid concentration is 20% before spending. The BET-E surfactant is then added to the solution at an active concentration of 3% by weight.

[0038] To better reflect the shearing environment at which the gel is exposed during the well treatment, the rheology is represented by a cluster of curves corresponding to different shear rates (open marks for the gels without methanol, filled marks with; viscosity at shear rates respectively equal to 40, 70 and 170 are represented respectively by circles, squares and triangles. For the gel without methanol, the curves show a flat viscosity from 75°F to 175°F, then the viscosity sharply declines in the temperature from 175°F to 225°F, followed by a lowered plateau from 225°F to 300°F. The second cluster of curves represents the gel made with 10% by volume methanol. The viscosity increases from 75°F to 200°F and maintained a plateau until 250°F, then a gentle decline toward 300°F.

[0039] Figure 4 shows the viscosity of gels similar to the gels of the previous figure 3, thus comprising 3w% of surfactant and 28% HCl, with various volume concentration of methanol. The six tested compositions comprise respectively no methanol (0%), 1%, 4%, 6%, 8% and 10%. An addition of only 1% of methanol is enough to significantly improve the viscosity at temperatures ranging between about 200°F and 250°F (about 93°C to about 120°C). With higher concentrations of methanol, the temperature limit can be extended up to about 300°F (about 150°C). For the tested formulation, best results were obtained with compositions comprising between about 6% and 8% of methanol. Higher methanol concentrations lead to a decrease of the gel viscosity for lower temperature.

[0040] Figure 5 shows that ethanol also helps to extend the maximum temperature of use of the gel but to a much smaller extent. Figure 5 presents results obtained with gels similar to the ones of figures 3 and 4. The dotted line corresponds to a gel without alcohol; the open squares to a gel with 1 % of methanol, the filled triangles to a gel with 1% of ethanol.

[0041] Figure 6 shows similar results obtained with a solution comprising only 15% HCl. Ethanol does not prove to be effective. Tests have shown that in 15% HCl, a solution comprising 5% of ethanol does not gel when acid spends.

[0042] Figure 7 and 8 show results performed with solutions that do not comprise hydrochloric acid, to get a viscosity profile similar to the one of the spent gel. Figure 7 shows the effect of the addition of isopropanol. As it can be seen, though good performances can be achieved with about 2% of isopropanol, the fluid is very sensitive to variations of the amount of isopropanol. As a result, any evaporation of isopropanol during the job will damage fluid performance. On the other hand, addition of methanol will minimize the effect of solvent

evaporation without decreasing fluid performance as shown figure 8. Therefore, concentrations of methanol between about 1% and about 8% by volume are typically preferred.

*Revised Claims for National Filing*

1. A method of treating a subterranean hydrocarbons reservoir comprising contacting the formation with a treating fluid comprising an aqueous solution, an acid and a surfactant acting as gelling agent essentially consisting of erucylamidopropyl betaine  
5 (or a protonated/deprotonated homolog or salt thereof).
2. The method of claim 1, wherein said acid is selected from the group consisting of hydrochloric acid, a mixture of hydrofluoric acid and hydrochloric acid, acetic acid and formic acid.
3. The method of claim 2, wherein said acid is present in said fluid at a concentration of  
10 at least 15% by weight.
4. The method according to any of the preceding claims wherein the treating fluid further comprises an alcohol.
5. The method of claim 4, wherein said alcohol is selected among the group consisting of methanol, ethanol and isopropanol.
6. The method of claim 5, wherein said alcohol is methanol and is present in said fluid at  
15 a concentration of between 0.1 and 10% by volume.
7. The method of claim 4, wherein said acid is present in said fluid at a concentration of between 3 and 28% by weight.
8. The method according to any of the preceding claims, wherein the treating fluid  
20 further comprises at least one additive selected among corrosion inhibitors, non-emulsifiers, iron reducing agents and chelating agents.
9. The method of claim 4, wherein the erucylamidopropyl betaine is present in said fluid at a concentration of between about 1 and about 4% by weight.
10. The method of claim 4 comprising contacting the formation with a mutual solvent and  
25 then, contacting the formation with a treating fluid comprising an aqueous solution, acid, methanol, and erucylamidopropyl betaine.

1/5

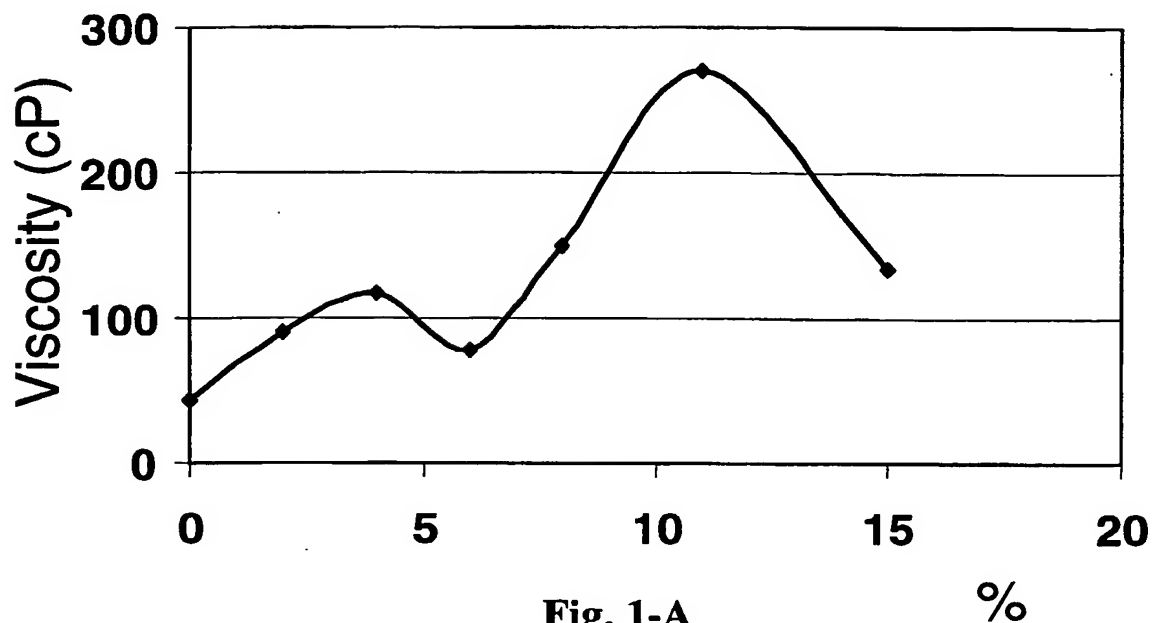


Fig. 1-A

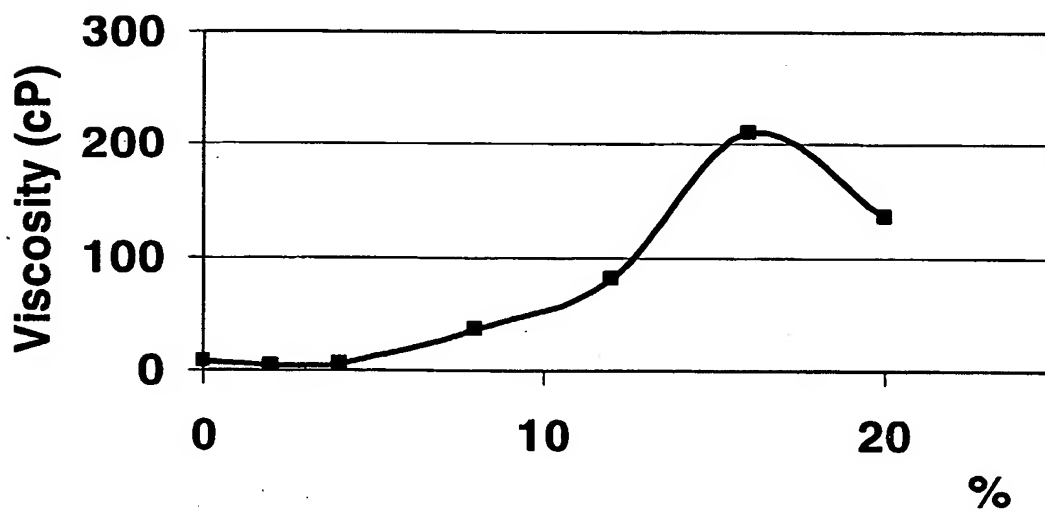


Fig. 1-B

2/5

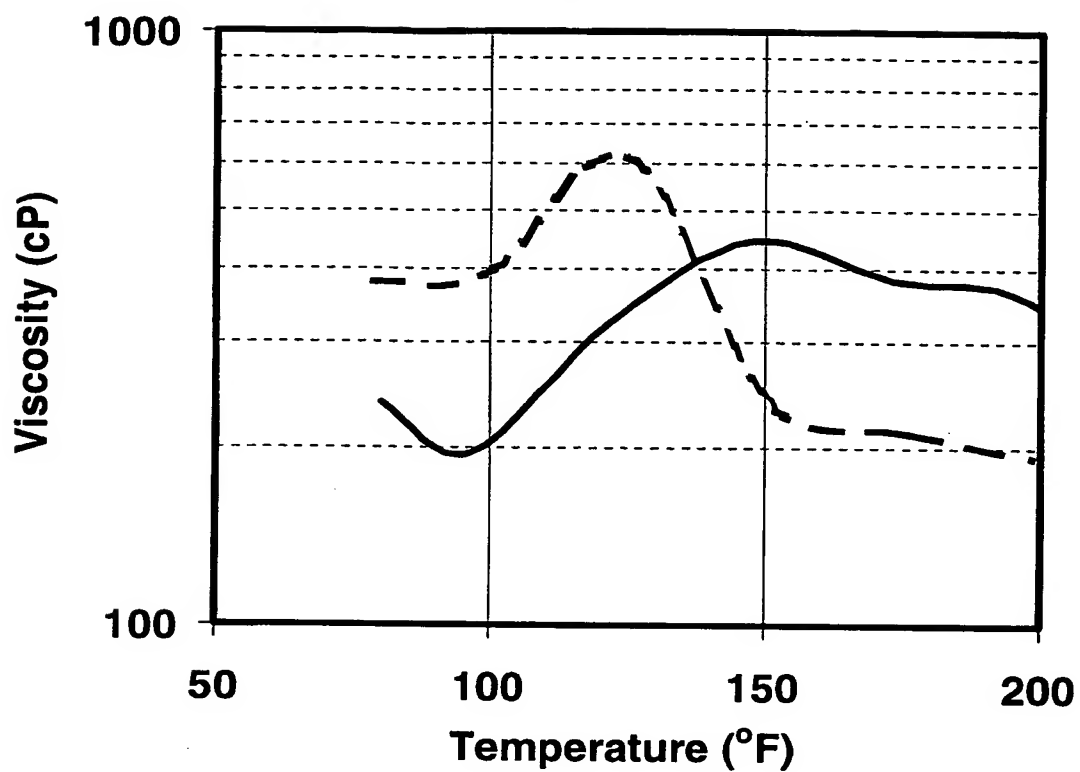


Fig. 2-B

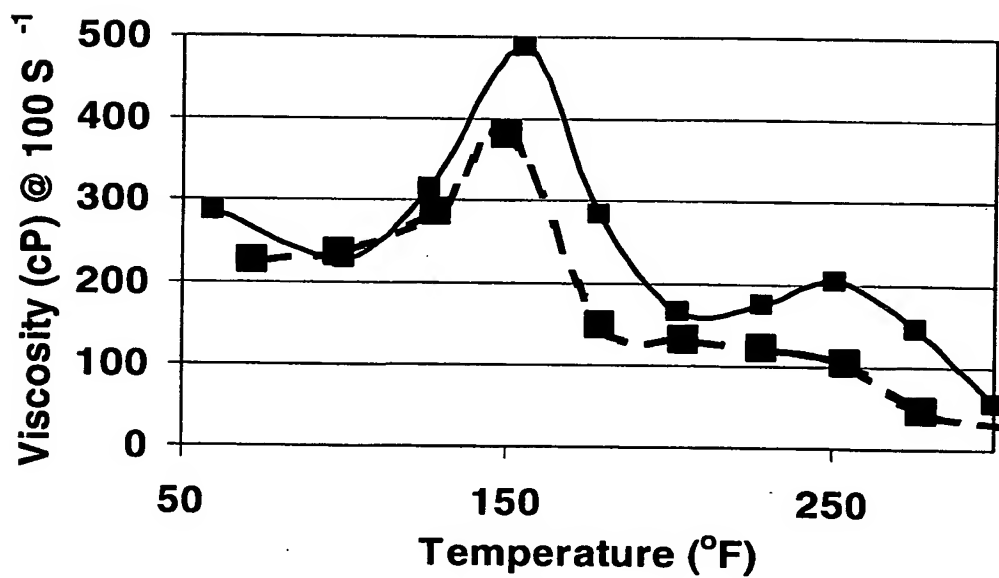


Fig. 2-B

3/5

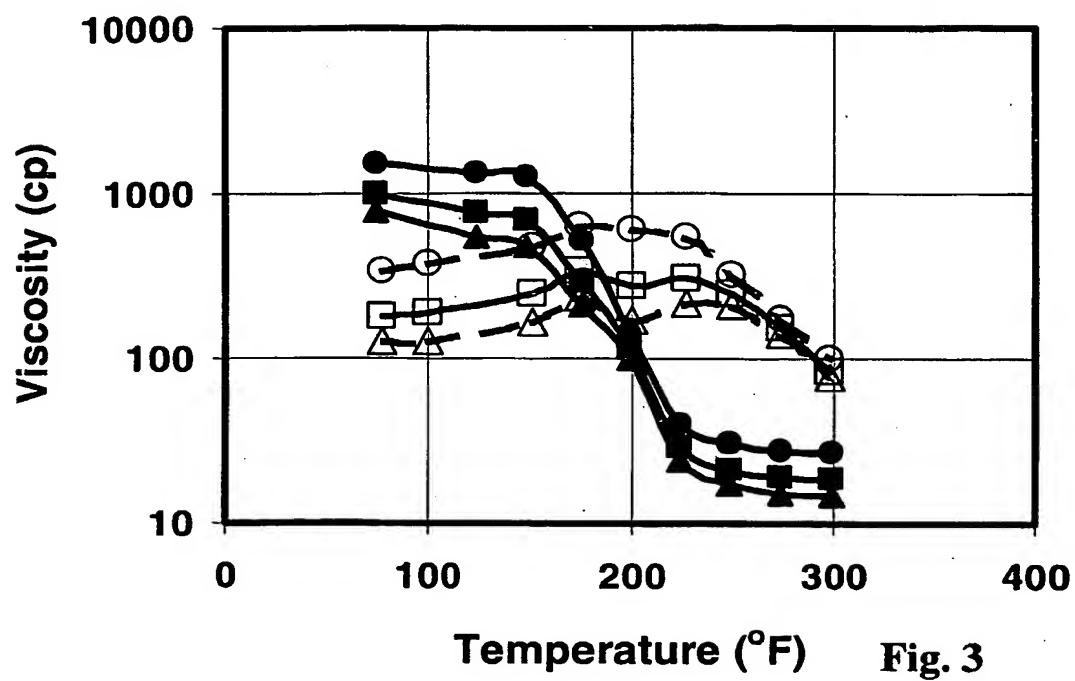


Fig. 3

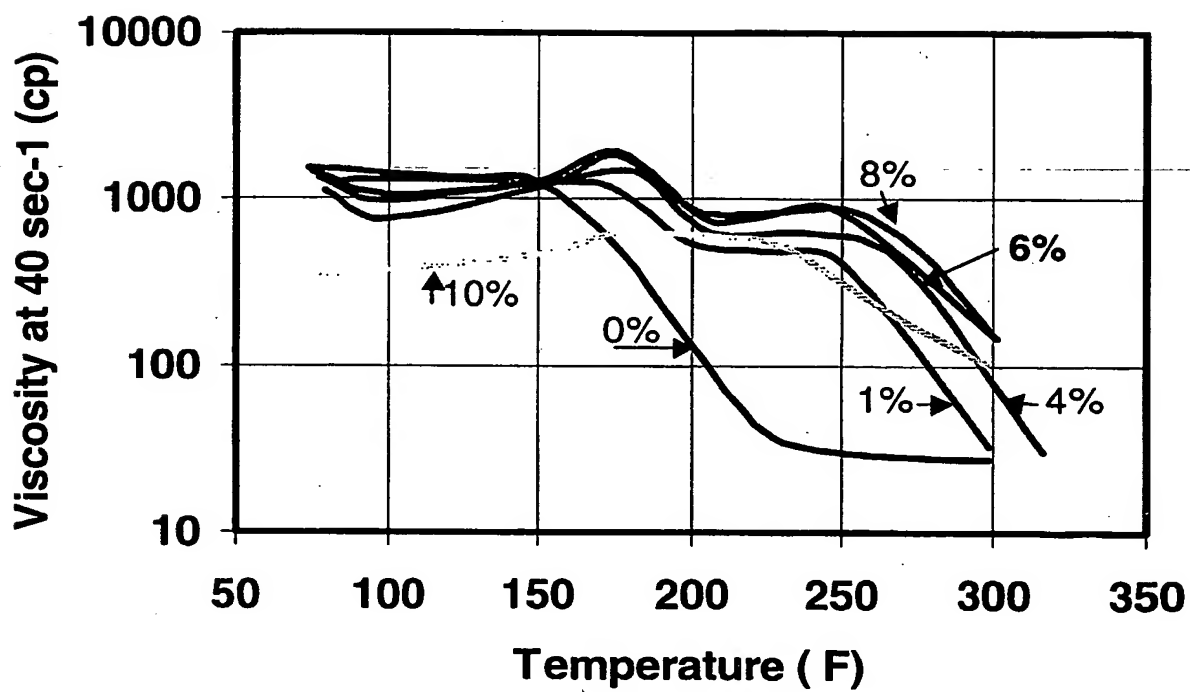


Fig. 4

4/5

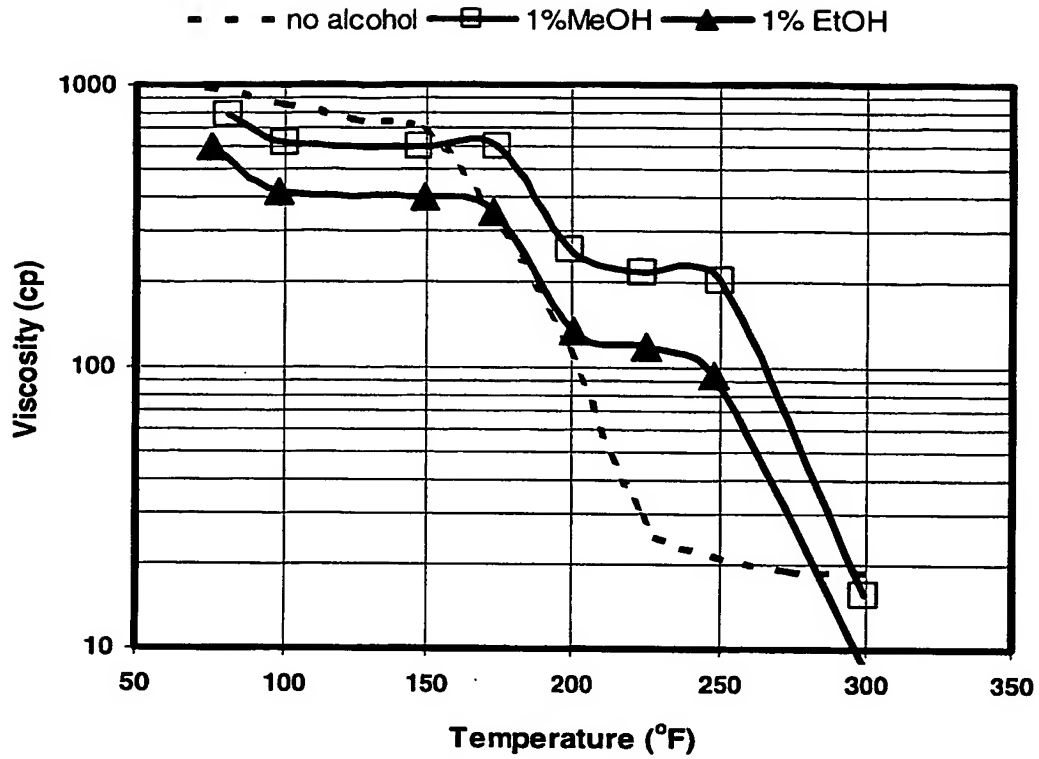


Fig. 5

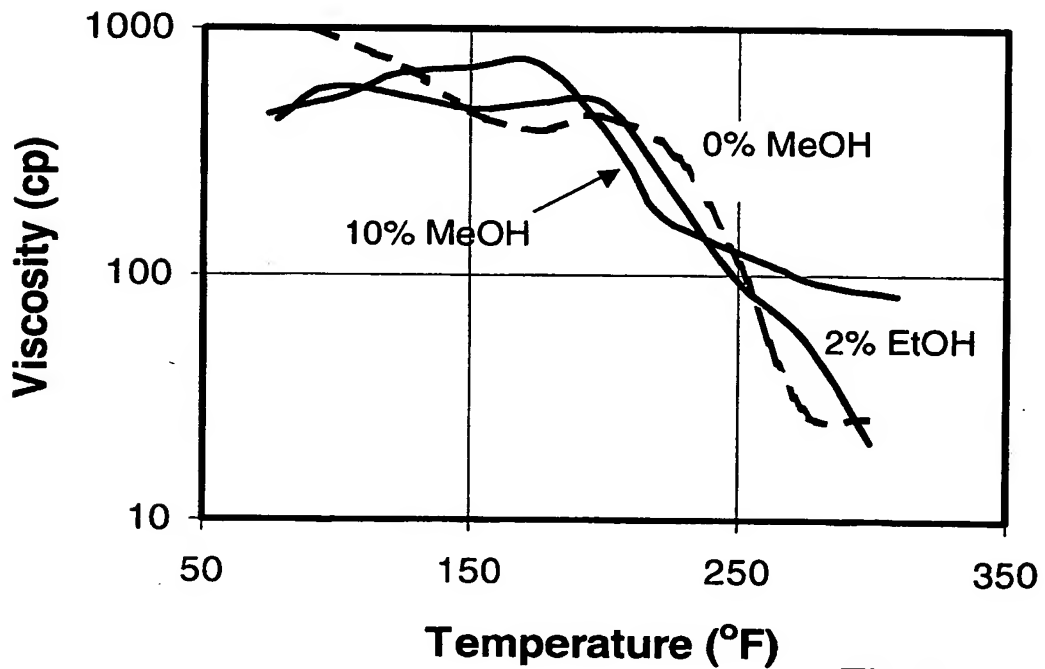


Fig. 6



5/5

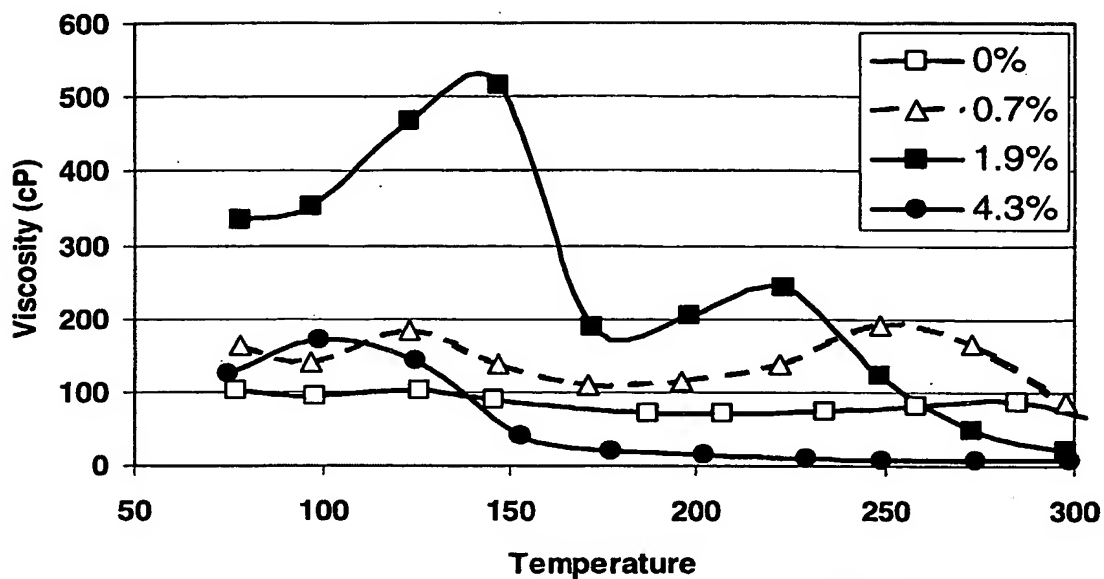


Fig. 7

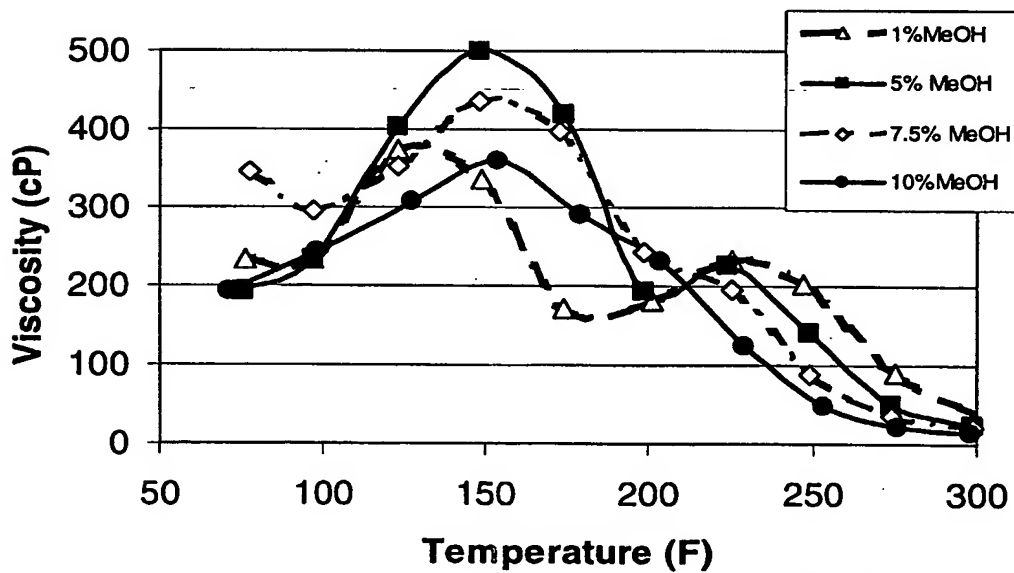


Fig. 8

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/13848

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 E21B43/27 E21B43/25

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 29369 A (SCHLUMBERGER TECHNOLOGY CORP) 26 April 2001 (2001-04-26) page 10, line 7 -page 11, line 10 page 15, line 5 -page 16, line 25; claims 1-9; figure 1; examples 1,2,4,5 ---	1-3,9
Y,P	WO 02 070862 A (SCHLUMBERGER HOLDINGS;SOFITECH NV ; SCHLUMBERGER CA LTD (CA); SCHL) 12 September 2002 (2002-09-12) paragraph '0005! - paragraph '0008! paragraph '0026! - paragraph '0027! paragraph '0030! - paragraph '0033! paragraph '0061!; claims 1,7 --- -/--	1,4,8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

27 May 2003

Date of mailing of the international search report

05/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Boulon, A

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/13848

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 01 77487 A (SCHLUMBERGER HOLDINGS; SOFITECH NV ; SCHLUMBERGER CA LTD (CA); SCHL) 18 October 2001 (2001-10-18) paragraph '0012! - paragraph '0014! paragraph '0028! - paragraph '0032! paragraph '0045! - paragraph '0048!; claims 1,6,7,16-18,24,26,27,31 -----	1,2,4,8
Y	US 5 009 799 A (SYRINEK ALLEN R ET AL) 23 April 1991 (1991-04-23) column 2, line 29 - column 3, line 43 column 4, line 28 - line 57 column 5, line 20 - line 43; claims 1,12,15 -----	1,2,8
Y,P	US 2002/039972 A1 (T.I.ALLAN) 4 April 2002 (2002-04-04) paragraph '0014! - paragraph '0019! paragraph '0023! - paragraph '0024! paragraph '0042!; claims 1,5,6 -----	1,2,4

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/13848

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0129369	A	26-04-2001	US 6399546 B1	04-06-2002
			AU 8011500 A	30-04-2001
			CA 2387248 A1	26-04-2001
			EP 1230468 A1	14-08-2002
			NO 20021684 A	14-06-2002
			WO 0129369 A1	26-04-2001
			US 2002132741 A1	19-09-2002
WO 02070862	A	12-09-2002	US 2002169085 A1	14-11-2002
			WO 02070862 A1	12-09-2002
WO 0177487	A	18-10-2001	AU 6017801 A	23-10-2001
			WO 0177487 A2	18-10-2001
			EP 1268976 A2	02-01-2003
			NO 20024685 A	04-10-2002
			US 2002004464 A1	10-01-2002
US 5009799	A	23-04-1991	NONE	
US 2002039972	A1	04-04-2002	CA 2315544 A1	08-02-2002
			CA 2354789 A1	08-02-2002